


Вы стали обладателем роутера D-Link.

Поздравляем!

Если Вы новичок, для настройки Вашего роутера, следуйте инструкции:

Прежде всего подключите кабель, который вам провели в квартиру наши монтажники в порт **WAN**, а компьютер подключите в любой из **LAN** портов (как правило используется соседний с WAN порт). Адаптер питания от роутера подключите к сети питания 220В (в розетку).

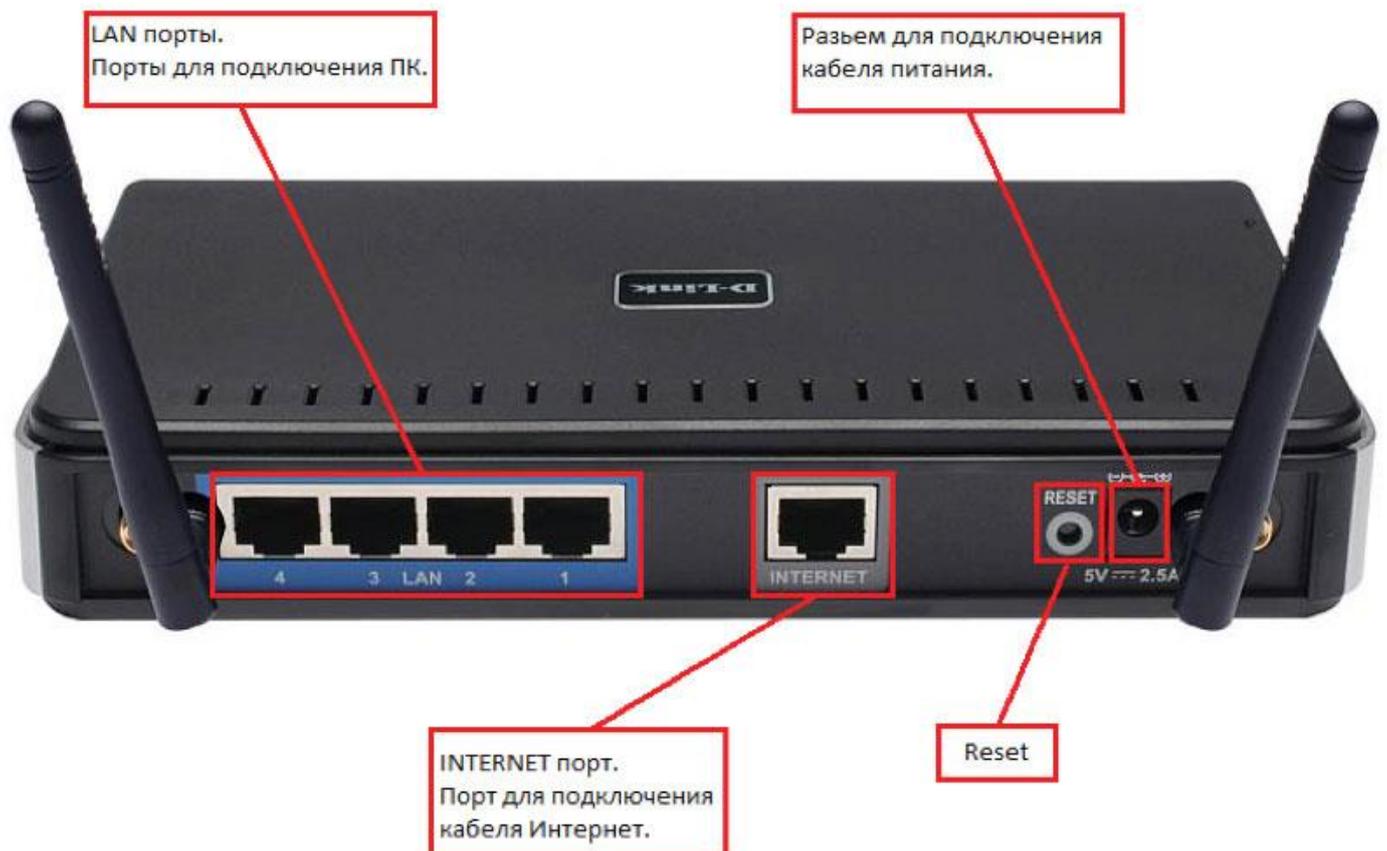

Далее откройте Internet Explorer (или любой другой установленный на Вашем ПК браузер), и в адресной строке наберите **192.168.1.1** после чего нажмите «Enter»;

LOGIN

Log in to the router:

User Name :

Password :

WIRELESS

В поле «User Name» введите [admin](#). Поле «Password» [оставьте пустым](#), нажмите «Login»;

Готово, теперь Вы находитесь в интерфейсе настройки роутера!

Перейдите на закладку [Setup](#), выберите [Internet](#) и нажмите кнопку [Manual Internet Connection Setup](#)

D-Link

DIR-615 //

SETUP **ADVANCED** **TOOLS** **STATUS** **SUPPORT**

INTERNET CONNECTION

There are two ways to set up your Internet connection: you can use the Web-based Internet Connection Setup Wizard, or you can manually configure the connection.

INTERNET CONNECTION WIZARD

If you would like to utilize our easy to use Web-based Wizards to assist you in connecting your new D-Link Systems Router to the Internet, click on the button below.

Note: Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.

MANUAL INTERNET CONNECTION OPTIONS

If you would like to configure the Internet settings of your new D-Link Systems Router manually, then click on the button below.

Helpful Hints...

If you are new to networking and have never configured a router before, click on **Internet Connection Setup Wizard** and the router will guide you through a few simple steps to get your network up and running.

If you consider yourself an advanced user and have configured a router before, click **Manual Internet Connection Setup** to input all the settings manually.

[More...](#)

WIRELESS

В пункте «[My Internet Connection Is](#)» выберите «[Dynamic IP \(DHCP\)](#)». Остальные поля оставьте без изменений и нажмите кнопку «[Save Settings](#)».

The screenshot shows the D-Link router configuration interface. At the top, the D-Link logo is displayed. Below it, a navigation bar includes 'DIR-615', 'SETUP', 'ADVANCED', 'TOOLS', 'STATUS', and 'SUPPORT'. The 'SETUP' tab is active, and the 'INTERNET' section is selected in the left sidebar. The main content area is titled 'WAN' and contains instructions for configuring the Internet Connection type. A note states that if using PPPoE, client software should be removed. Two buttons, 'Save Settings' and 'Don't Save Settings', are visible. Below this, the 'INTERNET CONNECTION TYPE' section has a dropdown menu set to 'Dynamic IP (DHCP)'. The 'DYNAMIC IP (DHCP) INTERNET CONNECTION TYPE' section includes fields for Host Name (DIR-615), DHCP routing option (unchecked), Use Unicasting (checked), Primary DNS Address (0.0.0.0), Secondary DNS Address (0.0.0.0), MTU (1500), and MAC Address (with a 'Clone Your PC's MAC Address' button).

Подождите пока роутер сохранит настройки и перезагрузится, обычно это занимает от 20 секунд до 2 минут.

Теперь настроим Wi-Fi на роутере

Для настройки Wi-Fi перейдите в раздел «[Setup](#)» и выберите пункт «[Manual Wireless Connection Setup](#)».

DIR-615 //	SETUP	ADVANCED	TOOLS	STATUS	SUPPORT
INTERNET	WIRELESS SETTINGS				Helpful Hints... If you are new to wireless networking and have never configured a wireless router before, click on Wireless Connection Setup Wizard and the router will guide you through a few simple steps to get your wireless network up and running. If you consider yourself an advanced user and have configured a wireless router before, click Manual Wireless Connection Setup to input all the settings manually. More...
WIRELESS SETTINGS	<p>The following Web-based wizards are designed to assist you in your wireless network setup and wireless device connection.</p> <p>Before launching these wizards, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.</p>				
NETWORK SETTINGS	WIRELESS NETWORK SETUP WIZARD <p>This wizard is designed to assist you in your wireless network setup. It will guide you through step-by-step instructions on how to set up your wireless network and how to make it secure.</p> <p style="text-align: center;">Wireless Connection Setup Wizard</p> <p>Note: Some changes made using this Setup Wizard may require you to change some settings on your wireless client adapters so they can still connect to the D-Link Router.</p>				
	ADD WIRELESS DEVICE WITH WPS (WI-FI PROTECTED SETUP) WIZARD <p>This wizard is designed to assist you in connecting your wireless device to your router. It will guide you through step-by-step instructions on how to get your wireless device connected. Click the button below to begin.</p> <p style="text-align: center;">Add Wireless Device with WPS</p>				
	MANUAL WIRELESS NETWORK SETUP <p>If your wireless network is already set up with Wi-Fi Protected Setup, manual configuration of the wireless network will destroy the existing wireless network. If you would like to configure the wireless settings of your new D-Link Systems Router manually, then click on the Manual Wireless Network Setup button below.</p> <p style="text-align: center;">Manual Wireless Connection Setup</p>				

Заполните поля следующим образом:

Поставьте отметку напротив **Enable Wireless** и выберите из списка **Always**,

Wireless Network Name — введите желаемое имя (название) вашей беспроводной сети, например Kyivstar-wifi,

802.11 Mode — выберите из списка **Mixed 802.11n, 802.11g and 802.11b**,

Поставьте отметку напротив **Enable Auto Channel Scan**,

Channel Width — выберите из списка **Auto 20/40 MHz**,

Visibility Status — поставьте отметку напротив **Visible**.

DIR-615 //	SETUP	ADVANCED	TOOLS	STATUS	HELP
INTERNET	<div style="border: 1px solid black; padding: 5px;"> <p>WIRELESS NETWORK :</p> <p>Use this section to configure the wireless settings for your D-Link Router. Please note that changes made on this section may also need to be duplicated on your Wireless Client.</p> <p> <input type="button" value="Save Settings"/> <input type="button" value="Don't Save Settings"/> </p> </div> <div style="border: 1px solid black; padding: 5px;"> <p>WI-FI PROTECTED SETUP (ALSO CALLED WCN 2.0 IN WINDOWS VISTA) :</p> <p> Enable : <input checked="" type="checkbox"/> </p> <p> Current PIN : 56494563 <input type="button" value="Generate New PIN"/> <input type="button" value="Reset PIN to Default"/> </p> <p> Wi-Fi Protected Status : Enabled / Not Configured <input type="button" value="Reset to Unconfigured"/> </p> </div> <div style="border: 1px solid black; padding: 5px;"> <p>WIRELESS NETWORK SETTINGS</p> <p> Enable Wireless : <input checked="" type="checkbox"/> <input type="button" value="Always"/> <input type="button" value="Add New"/> </p> <p> Wireless Network Name : My_wifi (Also called the SSID) </p> <p> 802.11 Mode : Mixed 802.11n, 802.11g and 802.11b </p> <p> Enable Auto Channel Scan : <input checked="" type="checkbox"/> </p> <p> Wireless Channel : 2.437 GHz - CH 6 </p> <p> Channel Width : Auto 20/40 MHz </p> <p> Visibility Status : <input checked="" type="radio"/> Visible <input type="radio"/> Invisible </p> </div>				<p>Helpful Hints...</p> <p>Changing your Wireless Network Name is the first step in securing your wireless network. Change it to a familiar name that does not contain any personal information.</p> <p>Enable Auto Channel Scan so that the router can select the best possible channel for your wireless network to operate on.</p> <p>Enabling Hidden Mode is another way to secure your network. With this option enabled, no wireless clients will be able to see your wireless network when they scan to see what's available. For your wireless devices to connect to your router, you will need to manually enter the Wireless Network Name on each device.</p> <p>If you have enabled Wireless Security, make sure you write down the Key or Passphrase that you have configured. You will need to enter this</p>
WIRELESS SETTINGS					
NETWORK SETTINGS					

Далее перейдем к настройке безопасности сети, для чего переходим в раздел **Wireless Security Mode** в пункте **Security Mode** выберите **WPA Personal**.

Опускаемся в раздел **WPA, WPA Mode** - выберите **Auto (WPA or WPA2)**.

Cipher Type – **TKIP and AES**.

Group Key Update Interval - оставьте **3600**.

В поле **Pre-Shared Key** введите пароль для доступа к вашей беспроводной сети (рекомендуем устанавливать сложный пароль, содержащий большие и маленькие буквы, цифры, а также спецсимволы, например: ApG23\$_mT@0).

Нажмите кнопку «**Save Settings**».

WIRELESS SECURITY MODE

To protect your privacy you can configure wireless security features. This device supports three wireless security modes, including WEP, WPA-Personal, and WPA-Enterprise. WEP is the original wireless encryption standard. WPA provides a higher level of security. WPA-Personal does not require an authentication server. The WPA-Enterprise option requires an external RADIUS server.

Security Mode :

WPA

Use **WPA or WPA2** mode to achieve a balance of strong security and best compatibility. This mode uses WPA for legacy clients while maintaining higher security with stations that are WPA2 capable. Also the strongest cipher that the client supports will be used. For best security, use **WPA2 Only** mode. This mode uses AES(CCMP) cipher and legacy stations are not allowed access with WPA security. For maximum compatibility, use **WPA Only**. This mode uses TKIP cipher. Some gaming and legacy devices work only in this mode.

To achieve better wireless performance use **WPA2 Only** security mode (or in other words AES cipher).

WPA Mode :

Cipher Type :

Group Key Update Interval : (seconds)

PRE-SHARED KEY

Enter an 8- to 63-character alphanumeric pass-phrase. For good security it should be of ample length and should not be a commonly known phrase.

Pre-Shared Key :

information on any wireless device that you connect to your wireless network.

[More...](#)

Подождите пока роутер сохранит настройки и перезагрузится, обычно это занимает от 20 секунд до 2 минут.

После перезагрузки беспроводная сеть готова к использованию.